


# CARRERA CRA-102

ENG / Quick Start Guide

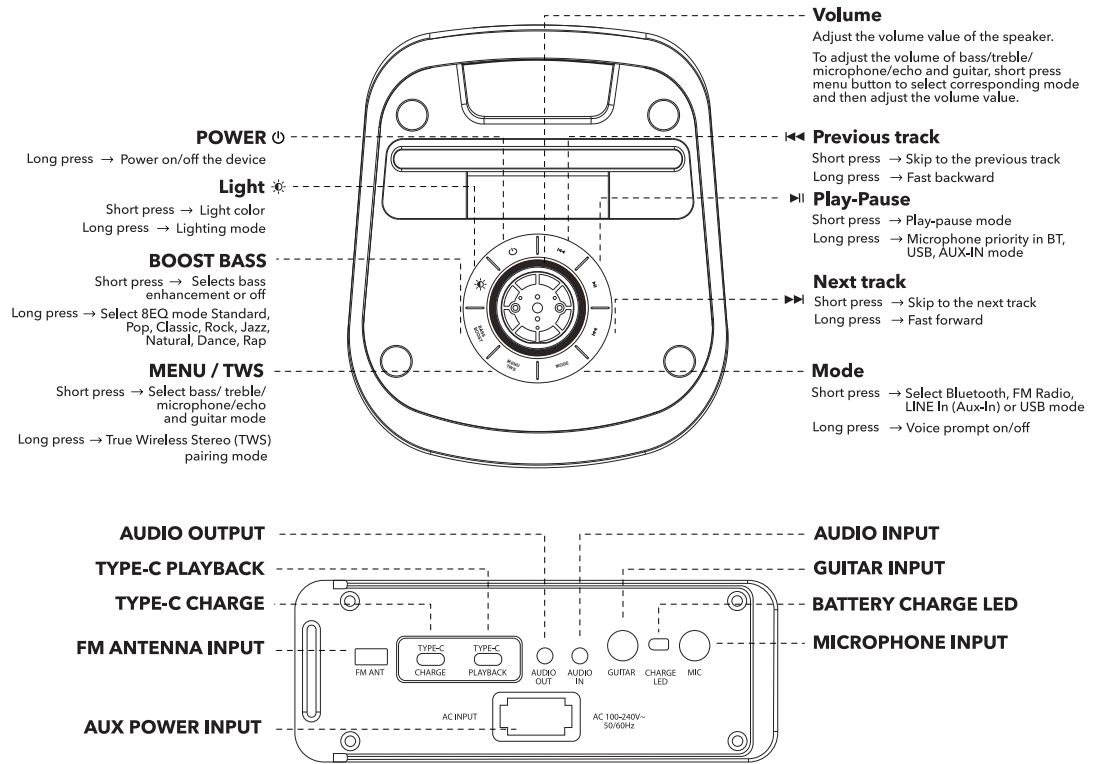

## POWER

Long press → Power on/off the device

## Light

Short press → Light color  
Long press → Lighting mode

## BOOST BASS

Short press → Selects bass enhancement or off  
Long press → Select 8EQ mode Standard, Pop, Classic, Rock, Jazz, Natural, Dance, Rap

## MENU / TWS

Short press → Select bass/ treble/microphone/echo and guitar mode  
Long press → True Wireless Stereo (TWS) pairing mode

## Volume

Adjust the volume value of the speaker.  
To adjust the volume of bass/treble/microphone/echo and guitar, short press menu button to select corresponding mode and then adjust the volume value.

## Previous track

Short press → Skip to the previous track  
Long press → Fast backward

## Play-Pause

Short press → Play-pause mode  
Long press → Microphone priority in BT, USB, AUX-IN mode

## Next track

Short press → Skip to the next track  
Long press → Fast forward

## Mode

Short press → Select Bluetooth, FM Radio, LINE In (Aux-In) or USB mode  
Long press → Voice prompt on/off

## AUDIO OUTPUT

### TYPE-C PLAYBACK

### TYPE-C CHARGE

### FM ANTENNA INPUT

### AUX POWER INPUT

## AUDIO INPUT

### GUITAR INPUT

### BATTERY CHARGE LED

### MICROPHONE INPUT

## POWER SUPPLY

Connect the supplied cable to AC power cord and charge the built in battery. Please make sure battery is fully charged. Use on/off button on the top panel to switch power on/off, Use power button on the remote control to switch power off.

## TYPE- C CONNECTION

Insert a TYPE- C drive into the TYPE- C playback port on the rear panel, press "MODE" button to select TYPE- C USB mode, the blue tooth speaker starts playing an audio track in the connected TYPE- C USB drive. It could also insert a Type- C to USB adapter into the TYPE- C playback port to play an audio track. The Type- C to USB adapter is compatible with most of laptop / tablet/smart phone with a USB Type-C port .

## CHARGING YOUR MOBILE DEVICE

1. Use the TYPE- C charging cable(not supplied) to connect TYPE- C port (DC 5V 1A) on the rear panel to the external device in power on mode for charging the mobile device.
2. Could also insert a Type- C to USB adapter into the TYPE- C charge port to start charging external device. It is compatible with most of laptop / tablet/smart phone with a Type- C to USB adapter.

## AUDIO(LINE IN)

Use the audio cable to connect the input terminal AUDIO - IN(LINE IN)on the rear panel of the unit, and connect the headphone socket of your audio device. Press [MODE] button to switch to AUDIO - IN(LINE IN) when the display appears AUDIO-IN(LINE IN). To play music on your phone, turn on your audio device and it starts playing.

## BLUETOOTH

1. Press mode button of the speaker to enter Bluetooth pairing mode.
2. Choose model name "Carrera CRA-102" on your Bluetooth device to connect.
3. Once successfully connected, you can stream audio from your Bluetooth device to this speaker.
4. When you turn on this speaker next time, it tries to reconnect the last connected device automatically.
5. If not, manually select model name "Carrera CRA-102" on your Bluetooth device to connect.
  - Turn off this speaker, or disable Bluetooth on your device to terminate the Bluetooth connection.
  - The maximum distance between the audio system and the connected device to ensure effective signal receipt is 10 meters.
  - If your phone receives a call while playing music in Bluetooth mode, the playback is paused and will not sound during the call. When the conversation is over, the device will reconnect and playback will continue.

## Thank you.

For having placed your trust in CARRERA - and for giving us the opportunity to prove you right with our party speaker system.

## Everything is driven by one idea.

Each CARRERA appliance follows a clear concept. No consideration of existing gender roles, no pink for women or blue for men. Since when did quality and performance have a gender? We create technology maximizing user friendliness, handling and aesthetics and bringing performance to life. Directly when switching on the appliance and even after many years. Performance is not just delivered by the speaker drivers alone, but results from the skillful interplay of each individual component. We just call it the CARRERA boost. Although we have not reinvented the wheel, we had the courage to do right what is crucial and to dispense with everything that is unimportant. That is our style. And you will rediscover it in each further CARRERA appliance.

## MICROPHONE PLAYBACK

1. Insert one microphone into the microphone socket on the rear panel and adjust the microphone volume to a low level, using the volume knob on the top panel or the "VOLUME DOWN" button on remote control.
2. Adjust the microphone volume level to the desired level use the microphone volume knob on the top panel, or the "VOLUME UP" button on remote control. Enjoy the karaoke singing!

## BATTERY CHARGE

Use the AC power cord(included) to connect the device's AC power input connector to the AC power outlet. It is best to switch on the unit before charging so that the display shows battery charging status, While charging, the charging-indicator line on the display will flash, when the three battery charging-indicator lines stop flashing and become solid. This indicates that the battery has been fully charged.

### Charging status

- 3 battery capacity lines light illuminated = approx 100% full charged, charging LED on rear panel shows green.
- 2 battery capacity lines light illuminated = app. 66.7% charge, charging LED on rear panel shows red.
- 1 battery capacity line light illuminated = app. 33.3% charge (indicates charging is required), charging LED on rear panel shows red.

## GUITAR IN CONNECTION

Connect a guitar to the party speaker directly via the 6.35mm Guitar input socket on the rear panel.


## TWS CONNECTION

1. Turn on your Bluetooth device and make sure it is in searching mode.
2. Select the model name "Carrera CRA-102" from the list of devices found and connect to it.
3. The master speaker will act as the left channel during TWS wireless connection and will receive the Bluetooth signal, the second speaker will act as the right channel for music playback.
  - TWS connection is only used between two identical speakers.
  - Select one speaker and long press "TWS" button to set MASTER speaker. The second Speaker will configured as SLAVE speaker automatically.
  - It may take a few seconds to establish the connection for the first time. The audio systems automatically reconnect with each other. As soon as the connection is established, sound will start to be playback to both systems simultaneously.

## Features

Bluetooth version: V5.3  
Output Power: 50W RMS  
Peak power: 500W  
Power supply: 100 V - 240 V / 50/60 Hz  
Frequency response: 30 Hz - 18 kHz (-6 dB)  
Speakers: Woofer 30W 6.5"x2+Tweeter 10W 2.25"x2  
Power cable: AC Power Cable(1.5 m)  
Battery type: Li-ion battery (7.4V 4000mAh)  
Battery charge time: 6 hours  
Music play times: Up to 6-8 hours  
Dimensions: W265\* H605\* D305mm  
Weight: 8.88 kg

## What's in the box



CRA-102



Remote control



Power cord




Type-C



QSG

# CARRERA CRA-102

RU / Краткое руководство

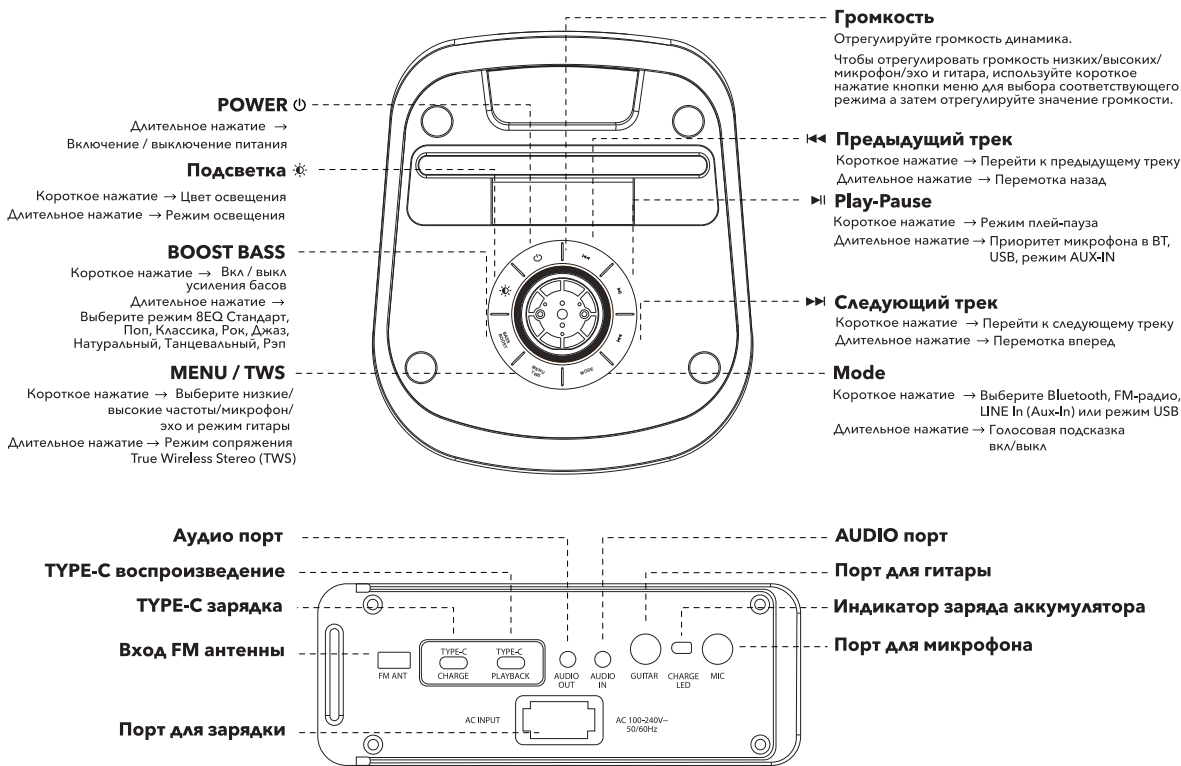

## ИСТОЧНИК ПИТАНИЯ

Подключите прилагаемый кабель к шнуру питания переменного тока и зарядите встроенный аккумулятор. Пожалуйста, убедитесь, что аккумулятор полностью заряжен. Используйте кнопку включения/выключения на верхней панели для включения/выключения питания. Используйте кнопку питания на пульте дистанционного управления для выключения питания.

## TYPE-C ПОРТ

Вставьте кабель TYPE-C в порт воспроизведения TYPE-C на задней панели, нажмите кнопку «MODE», чтобы выбрать режим USB TYPE-C, динамик начнет воспроизводить аудиодорожку на подключенном USB-накопителе TYPE-C. Он также может вставить адаптер Type-C-USB в порт воспроизведения TYPE-C для воспроизведения аудиодорожки. Адаптер Type-C на USB совместим с большинством ноутбуков/планшетов/смартфонов с портом USB Type-C.

## ПОДЗАРЯДКА ВАШИХ МОБИЛЬНЫХ УСТРОЙСТВ

- Используйте зарядный кабель TYPE-C (не входит в комплект) для подключения порта TYPE-C на задней панели к внешнему устройству во включенном режиме для зарядки мобильного устройства.
- Можно вставить адаптер Type-C-USB в порт зарядки TYPE-C, чтобы начать зарядку внешнего устройства. Он совместим с большинством ноутбуков/планшетов/смартфонов с адаптером Type-C к USB.

## AUDIO(LINE IN)

С помощью аудиокабеля подключите входной разъем AUDIO-IN(LINE IN) на задней панели устройства, а затем подключите разъем для наушников вашего аудиоустройства. Нажмите кнопку [MODE] для переключения на AUDIO-IN(LINE IN), когда на дисплее появится AUDIO-IN(LINE IN). Чтобы воспроизвести музыку на телефоне, включите аудиоустройство, и оно начнет воспроизводиться.

## BLUETOOTH

- Нажмите кнопку mode, чтобы войти в режим сопряжения Bluetooth.
- Выберите название модели на своем устройстве для подключения.
- После успешного подключения вы сможете транслировать звук с вашего устройства Bluetooth на это устройство.
- В момент следующего запуска, устройство попытается автоматически повторно подключить последнее подключенное устройство.
- Если нет, вручную выберите название модели «Carrera CRA-102» на устройстве Bluetooth для подключения.
  - Выключите это устройство или отключите Bluetooth на своем устройстве, чтобы разорвать соединение Bluetooth.
  - Максимальное расстояние между аудиосистемой и подключаемым устройством для обеспечения эффективного соединения составляет 10 метров.
  - Если на ваш телефон поступает вызов во время воспроизведения музыки в режиме Bluetooth, воспроизведение приостанавливается и не звучит во время вызова. Когда разговор закончится, устройство повторно подключится и воспроизведение продолжится.

## Спасибо!

Мы благодарим вас за использование продукции CARRERA и за возможность убедиться, что наша акустическая система для вечеринки – это правильный выбор.

## Единый подход.

В основе всех устройств CARRERA лежит единая концепция. Мы не делаем различий между полами – никакого розового цвета для женщин или синего для мужчин.

С каких пор качество и производительность связаны с полом? Мы стремимся создавать удобные, красивые и эффективные устройства, в которых высокие технологии будут сочетаться с удобством для пользователей. Вы будете наслаждаться ими с момента первого включения и в течение многих лет. Высокая производительность обусловлена не только высококачественными динамиками, но и эффективным взаимодействием всех компонентов устройства. Мы называем это "прорывом в стиле CARRERA". И хотя казалось бы, в этом нет ничего кардинально нового, мы стремимся доводить до совершенства действительно необходимые вещи и осваивать все оттого, что не является важным. Это наш стиль работы. Этот принцип лежит в основе всех устройств CARRERA.

## ИСПОЛЬЗОВАНИЕ МИКРОФОНА

- Вставьте один микрофон в гнездо для микрофона на задней панели и отрегулируйте громкость микрофона на низкий уровень с помощью ручки громкости на верхней панели или кнопки «УМЕНЬШЕНИЕ ГРОМКОСТИ» на пульте дистанционного управления.
- Отрегулируйте уровень громкости микрофона до желаемого уровня с помощью ручки громкости микрофона на верхней панели или кнопки «УВЕЛИЧЕНИЕ ГРОМКОСТИ» на пульте дистанционного управления. Наслаждайтесь пением в караоке!

## ПЕРЕЗАРЯЖАЕМАЯ АККУМУЛЯТОРНАЯ БАТАРЕЯ

Используйте шнур питания переменного тока (входит в комплект) для подключения входного разъема питания переменного тока устройству к розетке переменного тока. Лучше всего включить устройство перед зарядкой, чтобы на дисплее отображался статус зарядки аккумулятора. Во время зарядки линия индикатора зарядки горит. Дисплей начнет мигать, когда три линии индикатора зарядки аккумулятора перестанут мигать и станут гореть постоянно. Это указывает на то, что аккумулятор полностью заряжен.

### Статус зарядки

- Горят 3 индикатора емкости аккумулятора = полный заряд примерно на 100 %, светодиод зарядки на задней панели горит зеленым светом.
- Горят 2 индикатора емкости аккумулятора = приба. Заряд 66,7 %, светодиод зарядки на задней панели светится красным.
- Горит 1 индикатор емкости аккумулятора = приба. Заряд 33,3 % (означает, что требуется зарядка), светодиод зарядки на задней панели светится красным.

## ПОДКЛЮЧЕНИЕ ГИТАРЫ

Подключите гитару к динамику для вечеринки напрямую через входной разъем для гитары диаметром 6,5 мм на задней панели.

## TWS СОЕДИНЕНИЕ

- Включите устройство Bluetooth и убедитесь, что оно находится в режиме поиска.
- Выберите название модели «Carrera CRA-102» и подключитесь к ней.
- Главный динамик будет действовать как левый канал во время беспроводного подключения TWS и будет принимать сигнал Bluetooth, второй динамик будет действовать как правый канал для воспроизведения музыки.

- Соединение TWS используется только между двумя одинаковыми динамиками.
- Выберите один динамик, нажмите и удерживайте кнопку «TWS», чтобы установить ГЛАВНЫЙ динамик. Второй динамик будет автоматически настроен как ВЕДОМЫЙ динамик.
- Первое установление соединения может занять несколько секунд. Аудиосистемы автоматически восстанавливают соединение друг с другом. Как только соединение будет установлено, звук начнет воспроизводиться на обеих системах одновременно.

## Характеристики

Версия Bluetooth: V5.3  
Мощность: 50Вт  
Пиковая мощность: 500Вт  
Электропитание: 100В - 240В / 50/60 Гц  
Частотная характеристика: 30 Гц - 18 Гц  
Динамики: НЧ-динамик 30Вт 6.5"x2"  
ВЧ-динамик 10Вт 2.25"x2"

Питание: кабель питания (1,5 м)  
Тип батареи: литий-ионная батарея (7.4В 4000mAh)  
Время зарядки: 6 часов  
Рабочее время: до 6-8 часов  
Габариты: 265\*605\*305мм  
Вес нетто: 8.88 кг

## Комплект поставки



CRA-102



Пульт управления



Шнур питания



Type-C



Краткое руководство